




## Flowmeters ED series

With the flowmeters in the ED series, the user is guaranteed easy and immediate display of the minimum and maximum flow rates through flow rate indicators, fixed sliding along the graduated scale. The flowmeters in the ED series guarantee considerable savings in purchase and maintenance costs, whilst ensuring technical contents of a higher level than traditional flowmeters.

Maintaining the flow rate ranges unchanged, the ED series guarantees perfect interchangeability with the RG series flowmeters. After installation, the specific configuration of the flowmeters allows the measurement cone and relative internal components to be removed, making maintenance and cleaning easier and reducing the system stoppage times and costs to a minimum.

The technopolymer used to manufacture the flowmeters in the new ED series guarantees high chemical-mechanical resistance of the device (compatibility with a large part of the fluids used in the different industrial applications) and allows installations with working temperatures up to 120°C.

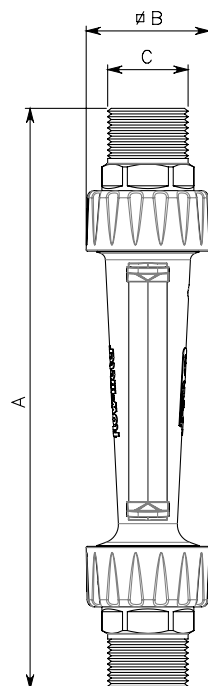



#### CHARACTERISTICS

Accuracy	± 5% V.F.S.
Working max. temperature	120° C.
Working max. pressure	25 bar at 15° C.
Body and connections construction material	PSU
Customised graduated scales available on request.	

TYPE	AIR Maximum flow Nm <sup>3</sup> /h 1013 mbar	WATER Maximum flow L/h	A	B	THREAD C
ED 1	10	600	195	43	G 3/8" - G 1/2" - G 3/4"
ED 2	25	2000	240	51	G 1/2" - G 3/4" - G 1"
ED 3	50	4000	270	59	G 3/4" - G 1" - G 1" 1/4