






Direct reading flowmeters type **RG - RG/L**

The flowmeters type RG-RG/L are instant flow measuring devices, suitable for small and medium flows of liquid and gaseous fluids. The flow measurement can be read with good accuracy on the graduated scale imprinted on the flowmeter body. The measure cone is got directly from the acrylic body.

They can be made with threaded connections. Another feature, besides the ones already mentioned, is:

- possibility of mounting the flowmeter anywhere along the pipeline without need of straight lines or flow correctors.

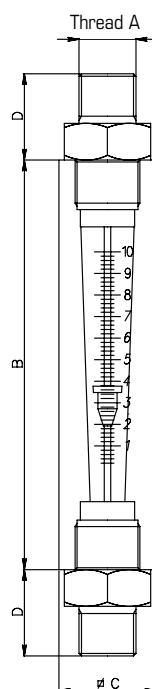

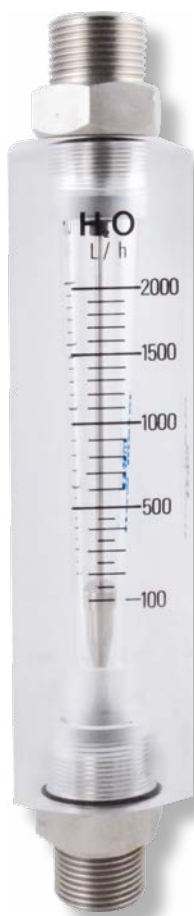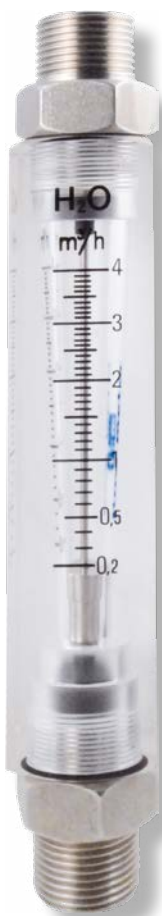

FEATURES

Accuracy	± 10% V.F.S.
Working max. pressure	10 bar
Working max. temperature	50° C.
Connections made of chrome-plated brass, AISI 316 or PVC	

ACCESSORIES

Connections for tubing

TYPE	AIR Maximum flow Nm³/h 1013 mbar	WATER Maximum flow L/h	THREAD A	B	C	D
RG 1	10	600	G 3/8" - G 1/2"	127	35	34
RG 1/L	10	600	G 3/8" - G 1/2"	200	40	34
RG 2	25	2000	G 1/2" - G 3/4" - G 1"	160	40	40
RG 3	40	4000	G 3/4" - G 1"	190	45	40
RG 3/L	40	4000	G 3/4" - G 1"	219	60	40
RG 4	100	12000	G 1" - G 1" 1/4 - G 1" 1/2	190	60	40
RG 4/L	150	12000	G 1" - G 1" 1/4 - G 1" 1/2	254	68	53